

Responses of Sap Flux Density to Changing Atmospheric Humidity in Three Common Street Tree Species in Bangkok, Thailand

Pantana Tor-ngern ^{1*} and Somsak Panha ²

¹Department of Environmental Science, Faculty of Science, Chulalongkorn University, Bangkok, Thailand

²Department of Biology, Faculty of Science, Chulalongkorn University, Bangkok, Thailand

Abstract

Efficient water management in urban landscape is imperative under the projected increases in drought stress under future climate. Because different tree species have different stomatal regulations to prevent water loss under water limitation, comparative study of species-specific responses of water use to changing weather conditions will benefit selective planting of urban trees for sustainable urban greening management. Here, we performed a simple and short-term investigation of water use characteristics of three common street tree species in Bangkok, a major city in Southeast Asia. Species included *Pterocarpus indicus* (*Pi*), *Swietenia macrophylla* (*Sm*) and *Lagerstroemia speciosa* (*Ls*). We used self-constructed heat dissipation probes to track water uptake rates, expressed as sap flux density (J_s), in stems of potted trees and examined their diurnal variations with changing atmospheric humidity, represented by vapor pressure deficit (D). The results implied that two of the three species: *Pi* and *Sm*, may be selected for planting because their J_s was less sensitive to changing D compared to *Ls*. The sap flux density of *Ls* increased more rapidly with rising D , implying higher sensitivity to drought in *Ls*, compared to the other two species. Nevertheless, further study on large trees and under longer period of investigation, covering both dry and wet seasons, is required to confirm this finding.

Keywords: Water Use Characteristics/ Sap Flux Density/ Vapor Pressure Deficit/ Urban Trees

Received: 4 May 2016 Accepted: 1 July 2016

DOI:

1. Introduction

Urban trees mitigate negative environmental effects from urbanization, such as pollution, increased greenhouse gas emission, and urban heat island (Deloya, 1993). Trees of various species in urban areas provide ecosystem services including clean air, shade and cooling effects, and recreational and educational values (Akbari, 2002; Pataki et al., 2006). Different tree species, under the same environmental conditions, may require different amounts of water for growth (Dierick and Hölscher, 2009). Within the same area, trees that use less irrigated water for growth, compared to others, may be considered as ecosystem 'disservice' (Lyytimäki et al., 2008), leaving greater amount of unabsorbed water percolating into the soils. From the perspective of water conservation, urban trees with low water use may be preferred. However, the magnitude of water use rate alone may not indicate how trees perform under changing environmental conditions, especially the predicted increased drought stress.

In fact, how urban trees respond to changing climate is important in lieu of the projected climate change impacts including intensified storms and drought and changing precipitation pattern (Aitken et al., 2008). Trees that can withstand prolonged drought period should be selected for planting since they require less maintenance. Moreover, trees that use water conservatively throughout fluctuating weather conditions should be favored. Species with different wood structures (e.g., ring- or diffuse-porous) possess different stomatal sensitivity to changing vapor pressure deficit and vulnerability

to cavitation in xylem (Litvak et al., 2012). Disparities in hydraulic architectures and vulnerabilities to cavitation present different safety limit on transpiration among species (Tyree and Zimmermann, 2002), thus implying different strategies for coping with drought stress. Thus, investigation on water use characteristics of various urban tree species to select species with greater potential for sustainable urban greening management is needed.

With these regards, we investigated the water use characteristics of three common street tree species in Bangkok, Thailand which is a major city in Southeast Asia. The city experiences sunny and hot conditions during the dry period from December to April which may be exacerbated by the heat island effect from urban construction (Weng and Yang, 2004). Additionally, a recent study analyzing land use change in a sectional area in Bangkok showed that agricultural and green areas have decreased since 1984 and were predicted to decline in 2024 (Thanvisitthpon, 2016). A previous study was dedicated to inventory assessments of tree species in Bangkok (Thaiutsa et al., 2008). In addition, two studies examined water relations in some street trees. One addressed different water use strategies of three species differing in leaf phenology based on leaf measurements (Puangchit et al., unpublished) while the other measured daily tree water use of four species of seedlings using direct measurement through gravimetric method (Kjelgren et al., 2008). Here, we applied a widely-used technique of sap flow measurement based on heat dissipation between two points along the stem

(Granier, 1985). This technique allows a continuous investigation of whole-tree water use at finer temporal resolution, such as diurnal timescale, where gravimetric or leaf-level measurements may not be practical. The instantaneous measurement of water uptake is useful because most ecosystem models incorporate stomatal dynamics which operate at fine timescale to determine plant responses to changing weather conditions (Bonan et al., 2014). Because vapor pressure deficit (D) has been shown as one of the main drivers for stomatal response in a wide range of tree species (Granier et al., 2000), we assessed changes of water use rate with variation of D . The main objective of this study was to compare water use responses to D at diurnal timescale among three common street tree species: *Pterocarpus indicus*, *Swietenia macrophylla*, and *Lagerstroemia speciosa*; hereafter, Pi , Sm , and Ls , respectively. According to Thaitua et al. (2008), the proportions of Pi , Sm , and Ls to the total number of street trees inventoried in Bangkok in 2001 were 41.9, 4.8 and 4.4 percent, respectively. The large difference between the proportions of Pi and the other two species was due to the much higher percentage of Pi street trees in Bangkok (see Table 3 in Thaitua et al., 2008). Another reason for choosing these species is because they have different leaf phenology and wood structure. The seasonality of leaf is facultative deciduous, evergreen and deciduous for Pi , Sm and Ls , respectively. The xylem arrangements of Pi , Sm and Ls are semi-ring-, diffuse- and ring-porous, respectively. Therefore, evaluating water use characteristics of the three species will provide insights into species-specific strategies to overcome drought stress, and hence the information for selective planting to achieve sustainable urban greening in the future.

2. Methodology

This study was conducted on the balcony of the 4th floor at the Department of Environmental Science building located in Chulalongkorn University in Bangkok, Thailand (13°N 100°E). The study period lasted one week, from December 13 to 19, 2015. We purchased 30 tree saplings of the three species and measured them to determine initial size (Table 1). Trees were originally grown in the same local field, harvested and potted into 20 L containers with mixed soil and bark growing medium. Potted trees were transported to the research site and irrigated with ~3 L water twice a day for four weeks to allow establishment of the trees prior to data collection. The same irrigation treatment was continued throughout the study period. Prior to each irrigation, soil moisture level was checked using a soil tester (Takemura Japan test instruments) to ensure that the trees were not under water limitation.

Thirty thermal dissipation probes (TDPs) were constructed. Each pair comprised two probes made of steel needles which were cut to 10 mm

long for temperature sensing. Although this length of sensing part differs from the original design (20 mm; Granier, 1985), it was validated and used for sap flux measurements in some species (Clearwater et al., 1999; Catovsky et al., 2002; James et al., 2002). Each needle contained a T-type thermocouple (copper-constantan) whose tip was in the middle of the sensing part. The constantan ends of the two thermocouples were connected to each other and each of the copper ends was connected to data logger to measure the temperature difference between the two probes. Each pair of sensors was inserted into stem with ~10 cm vertical spacing to each other. The downstream (upper) probe was continuously heated at constant power while the upstream (lower) probe was unheated and thus tracking ambient temperature of sapwood as reference. The temperature difference between both probes was affected by the heat dissipation effect of water flow in the vicinity of the heated probe. The temperature difference data were collected in millivolts every 30 minute by a data logger (CR1000, Campbell Scientific, Logan, UT, USA). Water mass per unit sapwood area per time, or sap flux density (J_s), was then calculated from the detected changes in temperature difference as (Granier, 1985).

$$J_s = 118.99 \times 10^{-6} \left(\frac{\Delta T_m - \Delta T}{\Delta T} \right)^{1.231} \quad (1)$$

where J_s is sap flux density in $\text{g}_{\text{H}_2\text{O}} \text{m}^{-2} \text{sapwood} \text{ s}^{-1}$, ΔT_m represents maximum temperature difference established between the heated and non-heated probes at zero flux (i.e., $J_s = 0$) in °C and ΔT is temperature difference between the two probes at a given time. We used the Baseline program version 3.0.7 (C-H₂O Ecology Group, Duke University, Durham, North Carolina, USA) to convert the voltage difference data to J_s . The program takes into account potential nocturnal fluxes resulting from nighttime transpiration and water recharge in the stem by selecting the highest daily ΔT to represent ΔT_m . The criteria for selection were conditions when (1) the average, minimum 2-hour vapor pressure deficit is <0.05 kPa, therefore ensuring transpiration is negligible, and (2) the standard deviation of the four highest values is <0.5% of the mean of these values, thus assuring water recharge above the sensor height is negligible (Oishi et al., 2008). Each TDP was installed at 10 mm depth from the inner bark of each tree and covered by a plastic sheet coated with reflective paint to prevent the natural thermal gradient. Because the stem sizes were small, radial variation of J_s should be minimal and only one depth of sensor was sufficient. Furthermore, we assumed that the non-conductive part of the stem was negligible due to small tree size and that stem cross-sectional area was equal to sapwood area.

Vapor pressure deficit (D) was used to represent atmospheric demand and was the main

focus of environmental response of J_s in this study. We installed two portable temperature and humidity data loggers (OM-92, Omega Engineering, Stamford, CT, USA) to measure air temperature and relative humidity at the site. The data were averaged to 30-minute values. Then, D was calculated as the difference between saturated and actual vapor pressure. The saturated vapor pressure (SVP in Pa) is expressed as (Monteith and Unsworth, 1990).

$$SVP = 610.7 \times 10^{7.5T/(237.3+T)} \quad (2)$$

$$D = \left(1 - \frac{RH}{100}\right) \times SVP \quad (3)$$

where T and RH are air temperature ($^{\circ}C$) and relative humidity (%), respectively.

We applied a t-test for comparison between J_s of each species on low and high D days. We utilized regression analyses for the J_s responses to D and an F-test for comparison of the response among species. Data analyses and visualization were conducted using MATLAB 7.12.0 R2011a (The MathWorks, Inc., Natick,

Massachusetts, USA) and SigmaPlot 12.0 (Systat Software, Inc., San Jose, California, USA).

3. Results and Discussion

Table 1 summarizes characteristics of the trees used in this study. Mean stem diameters at ~1 m above ground, i.e., approximately at sensor location, ranged from 2.72 to 3.34 cm among the three species with the coefficient of variation (CV) ranging from 9 to 22%. The relatively large range of CV values of tree size should not confound the comparison of J_s because it measures the value of water mass per unit area of sapwood covered by the sensing part of the probe.

During the one-week period, half-hourly vapor pressure deficit (D) ranged from 0.24 to 3.24 kPa. Trees experienced sunny condition during daytime with no cloudy or rain events observed. First, we evaluated J_s of all trees during two 24-hour periods for high and low D days (Fig. 1). Overall, the average half-hourly J_s of all species followed the pattern of D on both days (compare Fig. 1a and 1c for high D day, and Fig. 1b and 1d for low D day). While average J_s of Ls was significantly lower on the low D day ($p < 0.0001$), J_s of Pi and Sm remained similarly low compared to that on the high D day (compare Fig. 1a and 1b; $p \geq 0.18$).

Table 1: Characteristics of the trees.

Species	H (m)	d (cm)	A_s (cm ²)	n
<i>Pterocarpus indicus</i> (Pi)	2.86 ± 0.18	2.72 ± 0.59	6.04 ± 2.93	9
<i>Swietenia macrophylla</i> (Sm)	2.86 ± 0.22	3.34 ± 0.32	8.83 ± 1.67	10
<i>Lagerstroemia speciosa</i> (Ls)	2.77 ± 0.17	3.13 ± 0.39	7.80 ± 1.91	10

* H = tree height measured from the bottom of the pot to the tree top; d = stem diameter at 1 m from the pot base; A_s = sapwood area at 1 m from the bottom of the pot i.e. sensor location; n = number of plants used in the study. All values are expressed as mean ± one standard deviation (S.D.).

Next, we examined variations of half-hourly J_s relative to D of all species for the one-week period (Fig. 2). The response patterns corresponded well to diurnal J_s under different D conditions (Fig. 1) as previously described. Half-hourly J_s of Pi and Sm (solid and dotted curves in Fig. 2) were less sensitive to D , increasing at a slower rate at low D compared to the response of Ls (dashed curve in Fig. 2; see Table 2 for regression statistics). Moreover, J_s reached a saturation value which was higher in Ls compared to Pi and Sm (compare values at high D in Fig. 2).

The inset in Figure 2 shows the same fitting curves as in the main figure but with 95% confidence bounds. The inset indicates that water uptake rate of Ls was significantly greater than that of Pi and Sm across the wide range of D . Thus, when atmospheric demand increases (i.e., low humidity, high D), Ls uses a greater amount of water when compared to Pi and Sm . In other words, during a dry period, such as in the middle of the day, Pi and Sm use water more conservatively than Ls .

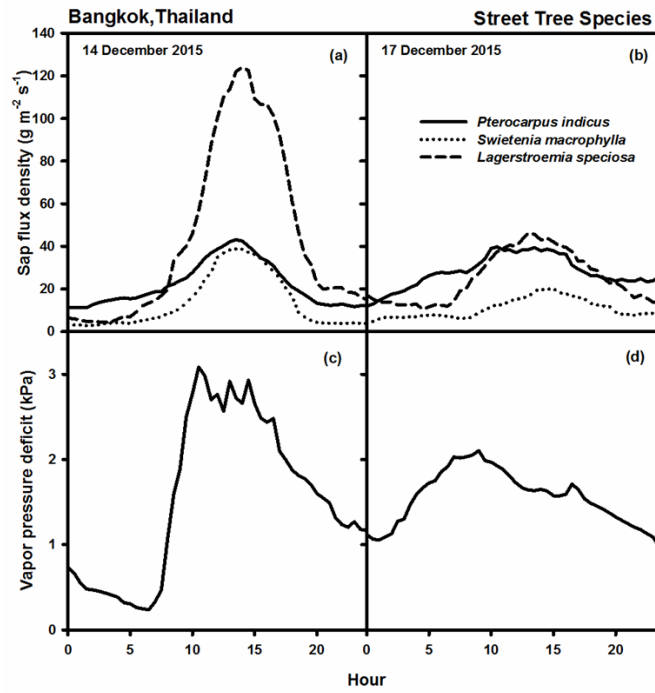



Figure 1: Diurnal patterns of sap flux density of all species during a high (a) and low (b) atmospheric demand days. Variation of vapor pressure deficit during a 24-hour period (c and d).

Table 2: Regression statistics of responses of sap flux density (J_s) to vapor pressure deficit (D) in Fig. 2.

Species	a	b	r^2	p
<i>Pterocarpus indicus</i> (Pi)	35.84	0.55	0.22	<0.0001
<i>Swietenia macrophylla</i> (Sm)	23.06	0.66	0.25	<0.0001
<i>Lagerstroemia speciosa</i> (Ls)	49.96	1.12	0.18	0.0003

* a and b are fitting parameters for the response of sap flux density (J_s) to vapor pressure deficit (D). The function is $J_s = a(1 - e^{-bD})$, where a is the saturating J_s at high D and b is the increasing rate of J_s relative to increasing D .

Figure 2: Responses of half-hourly sap flux density to changing transpirational demand, expressed as vapor pressure deficit, during the one-week period. Inset shows the same fitting functions as in the large figure with 95% confidence bounds. Regression statistics are presented in Table 2.

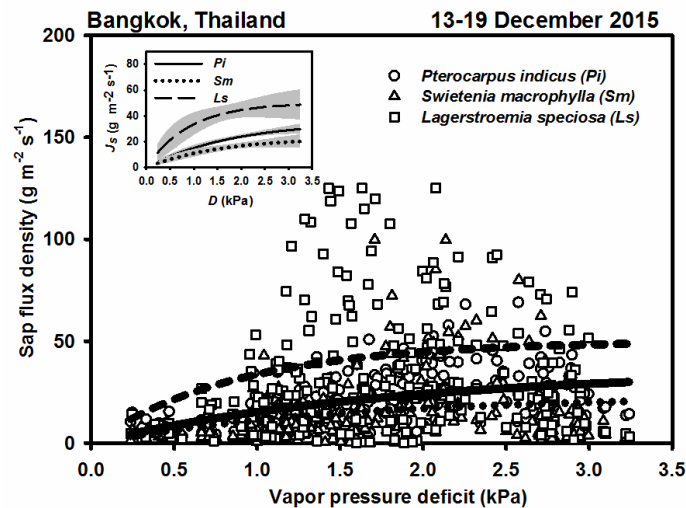

Our findings, based on simple measurement and analyses of J_s , agreed with results from the study using gravimetric method (Kjelgren et al., 2008) that observed high daily water use (i.e., the product of J_s and sapwood area) in *Lagerstroemia loudonii*, a similar species to *Ls*, and low and constant daily water use in *Pterocarpus indicus* (*Pi*) and *Swietenia macrophylla* (*Sm*). They showed that these response patterns were consistent over cool and hot periods of mid and late dry season. Furthermore, ring-porous species, which is *Ls* in this study, exhibit greater sensitivity of transpiration to D compared to diffuse-porous species (Litvak et al., 2012), supporting our observed highest sensitivity of J_s to D in *Ls*. Thus, our results implied that, at the same level of atmospheric humidity, *Ls* uses more water per unit sapwood area than *Pi* and *Sm*. With increasing transpirational demand and drought stress, water uptake rate of *Ls* increases faster than *Pi* and *Sm* and may risk hydraulic failure by exceeding the safety limit on transpiration.

4. Methodological considerations

We note that our J_s values were obtained from uncalibrated sensors. Equation (1), proposed by Granier (1985), has been widely used to compute J_s across a wide range of species but shown to underestimate the water use rate directly measured from gravimetric method in some species (Bush et al., 2010; Sun et al., 2012). Therefore, sensor calibration is recommended to obtain a new equation when studying new species (Sun et al., 2012). However, our comparative study focused on the response patterns rather than the absolute values of water uptake rate. Thus, the lack of sensor calibration should not be greatly affected.

5. Conclusions

Our study revealed that *Pterocarpus indicus* and *Swietenia macrophylla* may be preferred under conditions of high transpirational demand, or during the dry period, which is usually experienced in urban areas with the heat island effect. This is because of their conservative water use characteristics relative to that of *Lagerstroemia speciosa* which is highly sensitive to changing atmospheric humidity. However, further study conducted on large, intact trees and under seasonal variations of atmospheric conditions is needed to confirm this finding. Additionally, other aspects may need to be concurrently considered since water use is also associated with other ecosystem services, such as, carbon sequestration and canopy size (for shades). Such ecosystem services are also of consideration when making decisions about tree planting in cities.

6. Acknowledgements

This study was financially supported by Grants for Development of New Faculty Staff,

Ratchadaphiseksomphot Endowment Fund, Chulalongkorn University. Also, we would like to thank the Department of Environmental Science, Chulalongkorn University for providing space and facility for conducting the research.

7. References

- Aitken SN, Yeaman S, Holliday JA, Wang T, Curtis-McLane S. Adaptation, migration or extirpation: climate change outcomes for tree populations. *Evolutionary Applications* 2008;95-111.
- Akbari H. Shade trees reduce building energy use and CO₂ emissions from power plants. *Environmental Pollution* 2002;116:119-216.
- Bonan GB, Williams M, Fisher RA, Oleson KW. Modeling stomatal conductance in the early system: linking leaf water-use efficiency and water transport along the soil-plant-atmosphere continuum. *Geoscientific Model Development* 2014;17:2193-222.
- Bush SE, Hultine KR, Sperry JS, Ehleringer JR. Calibration of thermal dissipation sap flow probes for ring- and diffuse-porous trees. *Tree Physiology* 2010;30:1545-54.
- Catovsky S, Holbrook NM, Bazzaz FA. Coupling whole-tree transpiration and canopy photosynthesis in coniferous and broad-leaved tree species. *Canadian Journal of Forest Research* 2002;32:295-309.
- Clearwater MJ, Meinzer FC, Andrade JL, Goldstein G, Holbrook NM. Potential errors in measurement of nonuniform sap flow using heat dissipation probes. *Tree Physiology* 1999;19:681-7.
- Deloya MC. Urban forestry activities in Mexico. *Unasylva* 1993;173:28-32.
- Dierick D, Hölscher D. Species-specific tree water use characteristics in reforestation stands in the Philippines. *Agricultural and Forest Meteorology* 2009;149:1317-26.
- Granier A. Une nouvelle méthode pour la mesure du flux de sève brute dans le tronc des arbres. *Annals of Forest Science* 1985;42:193-200.
- Granier A, Loustau D, Bréda N. A generic model of forest canopy conductance dependent on climate, soil water availability and leaf area index. *Annals of Forest Science* 2000;57:755-65.
- James SA, Clearwater MJ, Meinzer FC, Goldstein G. Heat dissipation sensors of variable length for the measurement of sap flow in trees with deep sapwood. *Tree Physiology* 2002;22:277-83.
- Kjelgren R, Puangchit L, Sriladda C, Someechai M. Water use of four street tree species in Bangkok, Thailand. *Acta Horticulture* 2008;792:405-9.
- Litvak E, McCarthy HR, Pataki DE. Transpiration sensitivity of urban trees in a semi-arid climate is constrained by xylem vulnerability to cavitation. *Tree Physiology* 2012;32:373-88.

- Lyytimäki J, Peterson LK, Normander B, Bezak P. Nature as a nuisance? Ecosystem services and disservices to urban lifestyle. *Environmental Sciences* 2008;5:161-72.
- Monteith JL, Unsworth MH. *Principles of Environmental Physics*. Butterworth-Heinemann; 1990. p. 287.
- Oishi AC, Oren R, Stoy PC. Estimating components of forest evapotranspiration: a footprint approach for scaling sap flux measurements. *Agricultural and Forest Meteorology* 2008;148:1719-32.
- Pataki DE, Alig RJ, Fung AS, Golubiewski NE, Kennedy CA, McPherson EG, Nowak DJ, Pouyat RV, Lankao PR. Urban ecosystems and the North American carbon cycle. *Global Change Biology* 2006;12:2092-101.
- Puangchit L, Sriladda C, Kjelgren R, Someechai, M. Water relations of three tree species growing in the streetside forest of Bangkok, Thailand during the monsoonal dry season. (unpublished). 2014.
- Sun H, Aubrey DP, Teskey RO. A simple calibration improved the accuracy of the thermal dissipation technique for sap flow measurements in juvenile trees of six species. *Trees* 2012;26:631-40.
- Thaiutsa B, Puangchit L, Kjelgren R, Arunpraparut W. Urban green space, street tree and heritage large tree assessment in Bangkok, Thailand. *Urban Forestry & Urban Greening* 2008;7:219-29.
- Thanvisitthpon N. Modeling of urban land use changes: a case study of communities near Rajamangala University of Technology Thanyaburi. *Environment and Natural Resources Journal* 2016;14:44-50.
- Tyree MT, Zimmermann MH. *Xylem structure and the ascent of sap*. Springer, Heidelberg, Germany: Springer; 2002.
- Weng QH, Yang SH. Managing the adverse thermal effects of urban development in a densely populated Chinese city. *Journal of Environmental Management* 2004;70:145-56.